

	MATERIAL		
1	N-LAK22		
2	N-SF6HT		

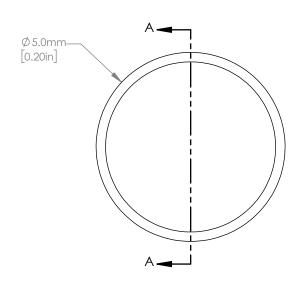

## NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 706.5nm, 855.0nm, & 1015.0nm
- DESIGN WAVELENGTH: 706.5nm, 855.0nm, FOCAL LENGTH: 15.0mm ± 1% AT 855.0nm BACK FOCAL LENGTH (REF): 13.0mm CLEAR APERTURE: > \$\Delta\$ 4.50mm SURFACE QUALITY: 40-20 SCRATCH-DIG CENTRATION: <3arcmin DIAMETER TOLERANCE: +0.0/-0.1mm

- 2. 3. 4. 5. 6. 7. 8. 9.
- THICKNESS TOLERANCE: ±0.20mm COATING: BBAR Ravg <0.5% FROM 650-1050nm, 0° AOI, ON OUTER OPTICAL SURFACES

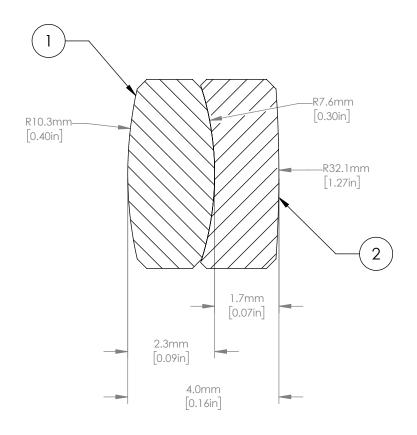

RAWING ROJECTION		] 🗇	不會创光科 RCOPTICS			
	NAME	DATE	D5mm, F=15mm, Near IR Achromat, B Coated			
DRAWN	CWD	2022/5/18	AD005-15-B			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.00026kg		A	

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES