
	MATERIAL		
1	N-LAK10		
2	N-SF6HT		

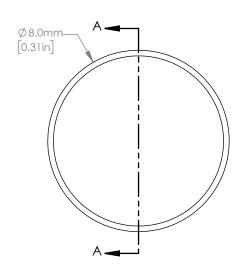


## NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 706.5nm, 855.0nm, & 1015.0nm FOCAL LENGTH: 10.1mm  $\pm 1\%$  AT 855.0nm BACK FOCAL LENGTH (REF): 7.0mm CLEAR APERTURE:  $> \phi 7.20$ mm SURFACE QUALITY: 40-20 SCRATCH-DIG

- CENTRATION: <3arcmin
- 2. 3. 4. 5. 6. 7. 8. 9.
- DIAMETER TOLERANCE: +0.0/-0.1mm
  THICKNESS TOLERANCE: ±0.20mm
  COATING: BBAR Ravg <0.5% FROM 650-1050nm, 0° AOI,
  ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

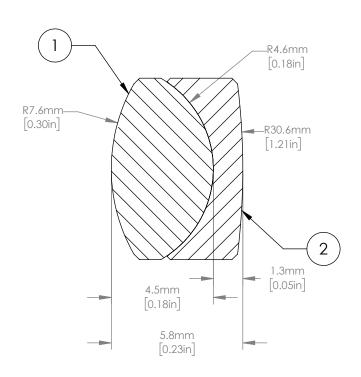

DRAWING PROJECTION	N 🔾 🍥		客创光科 RCOPTICS			
	NAME	DATE	D8mm, F=10mm, Near IR Achromat, B Coated			
DRAWN	CWD	2022/5/18	AD008-10-B			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.00091kg		A	