
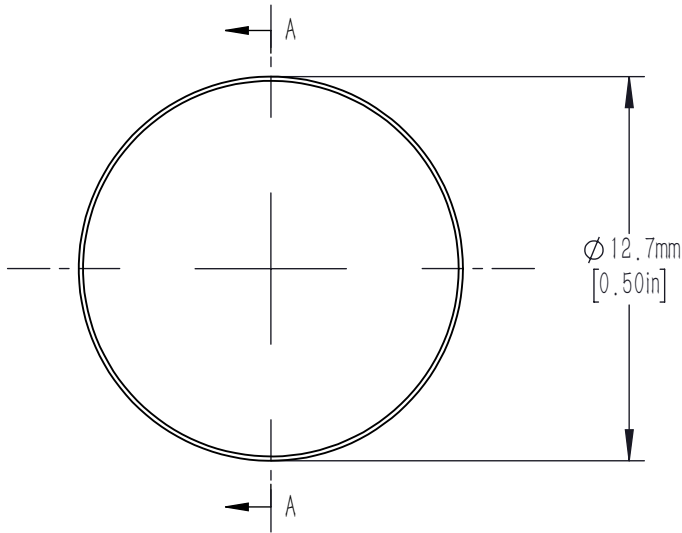



	MATERIAL
①	N-LAK22
②	N-SF6

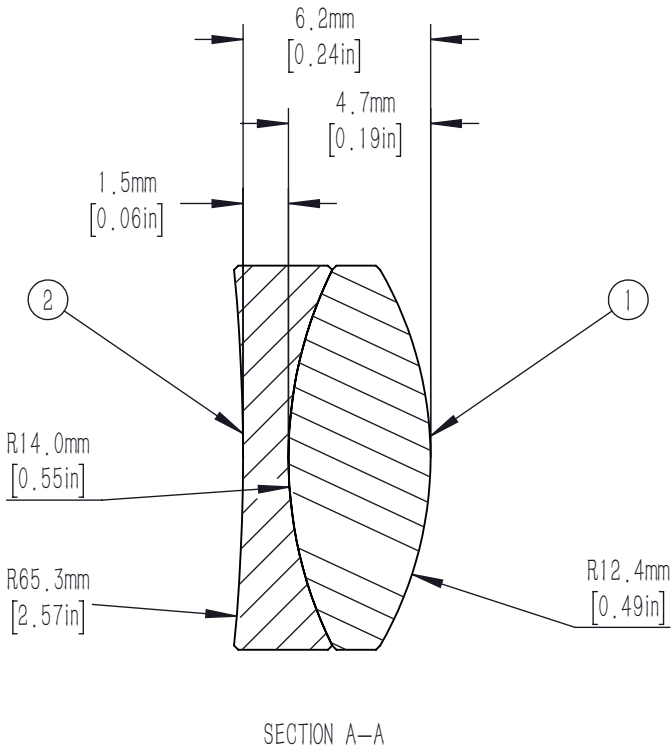

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTHS: 1016.0nm, 1330.0nm, & 1550.0nm
- FOCAL LENGTH: $f=30.0\text{mm} \pm 1\%$ AT 1330.0nm
- BACK FOCAL LENGTH (REF): 24.5mm
- CLEAR APERTURE $> 11.43\text{mm}$
- SURFACE QUALITY: 40-20 SCRATCH-DIG
- CENTRATION: $< 3\text{arcmin}$
- DIAMETER TOLERANCE: $+0.0/-0.1\text{mm}$
- THICKNESS TOLERANCE: $\pm 0.10\text{mm}$
- COATING: BBAR $R_{\text{avg}} < 0.5\%$ FROM 1050-1700nm, 0 AOI, ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 睿创光科 RCOPTICS			
	NAME	DATE	Mounted D12.7mm, F=30mm, Near IR Achromat, B Coated			
DRAWN	CWD	2022/5/18	AD127-30-C			
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			SEE TABLE	0.00250Kg	4:1	A