
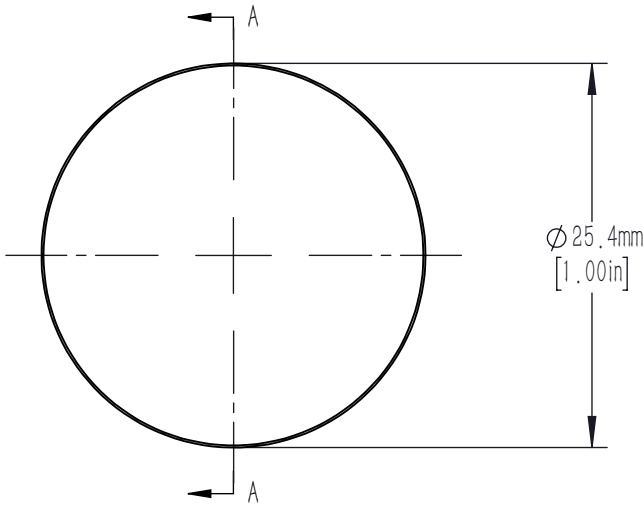



	MATERIAL
①	N-BAF10
②	N-SF6

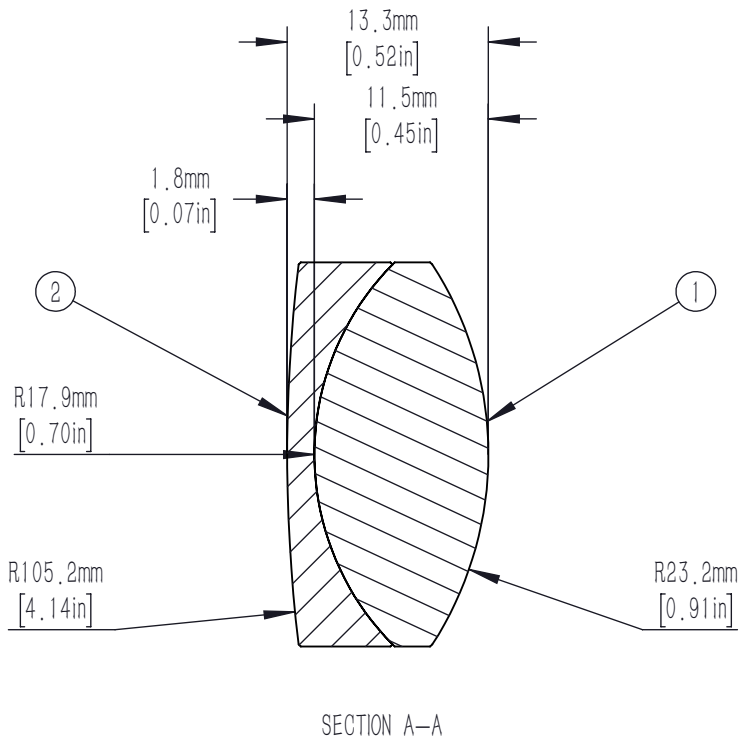

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTHS: 1016.0nm, 1330.0nm, & 1550.0nm
- FOCAL LENGTH: $f=35.1\text{mm} \pm 1\%$ AT 1330.0nm
- BACK FOCAL LENGTH (REF): 27.4mm
- CLEAR APERTURE $> 22.86\text{mm}$
- SURFACE QUALITY: 40-20 SCRATCH-DIG
- CENTRATION: $< 3\text{arcmin}$
- DIAMETER TOLERANCE: $+0.0/-0.1\text{mm}$
- THICKNESS TOLERANCE: $\pm 0.10\text{mm}$
- COATING: BBAR $\text{Ravg} < 0.5\%$ FROM 1050-1700nm, 0 AOI, ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 睿创光科 RCOPTICS			
	NAME	DATE	D25.4mm, F=35mm, Telecom Achromat, C Coated			
DRAWN	CWD	2022/5/18	AD254-35-C			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			SEE TABLE	0.02028Kg	2:1	A