
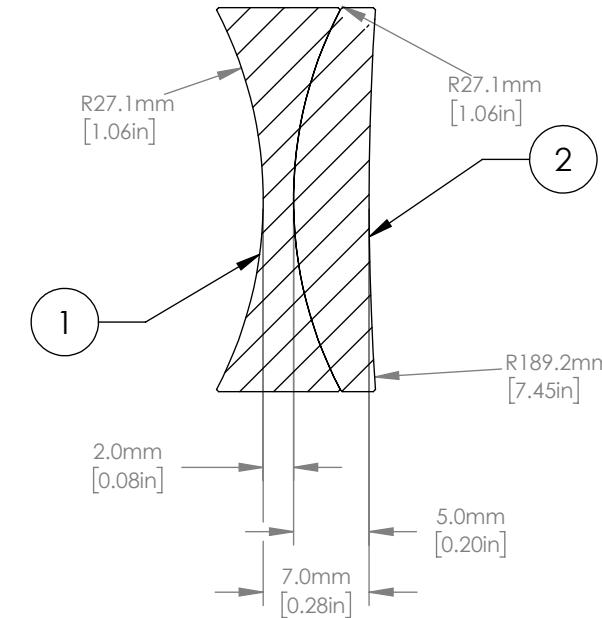


| | MATERIAL |
|---|----------|
| ① | N-BAF10 |
| ② | N-SF11 |

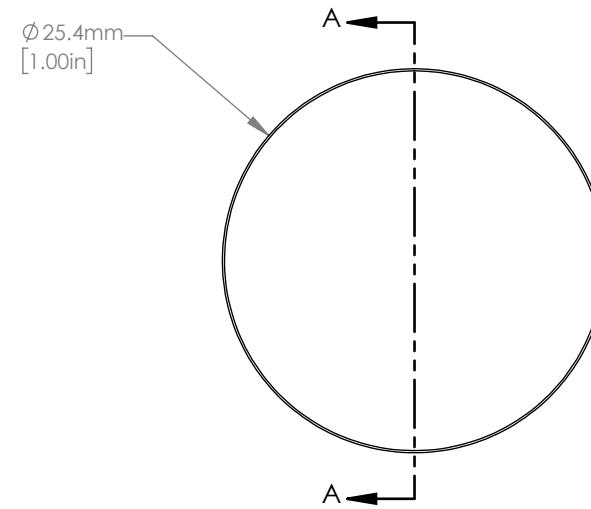

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 486.1nm, 587.6nm, & 656.3nm
2. FOCAL LENGTH: -40.1mm $\pm 1\%$
3. BACK FOCAL LENGTH(REF): -43.6mm
4. CLEAR APERTURE: $> \varnothing 22.86\text{mm}$
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. CENTRATION: $< 3\text{arcmin}$
7. DIAMETER TOLERANCE: $+0.0/-0.1\text{mm}$
8. THICKNESS TOLERANCE: $\pm 0.20\text{mm}$
9. COATING: BBAR Ravg $< 0.5\%$ FROM 400-700nm, 0° AOI, ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | | 睿创光科 RCOPTICS | | | |
|--|------|-----------|--------------------------------------|-----------|---------|-----|
| | NAME | DATE | D25.4mm, F=-40.0mm, Visible Achromat | | | |
| DRAWN | CWD | 2022/5/18 | ADN254--40-A | | | |
| APPROVAL | ZSB | 2022/5/18 | MATERIAL | WEIGHT | SCALE | REV |
| FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES | | | | SEE TABLE | 0.016kg | A |