
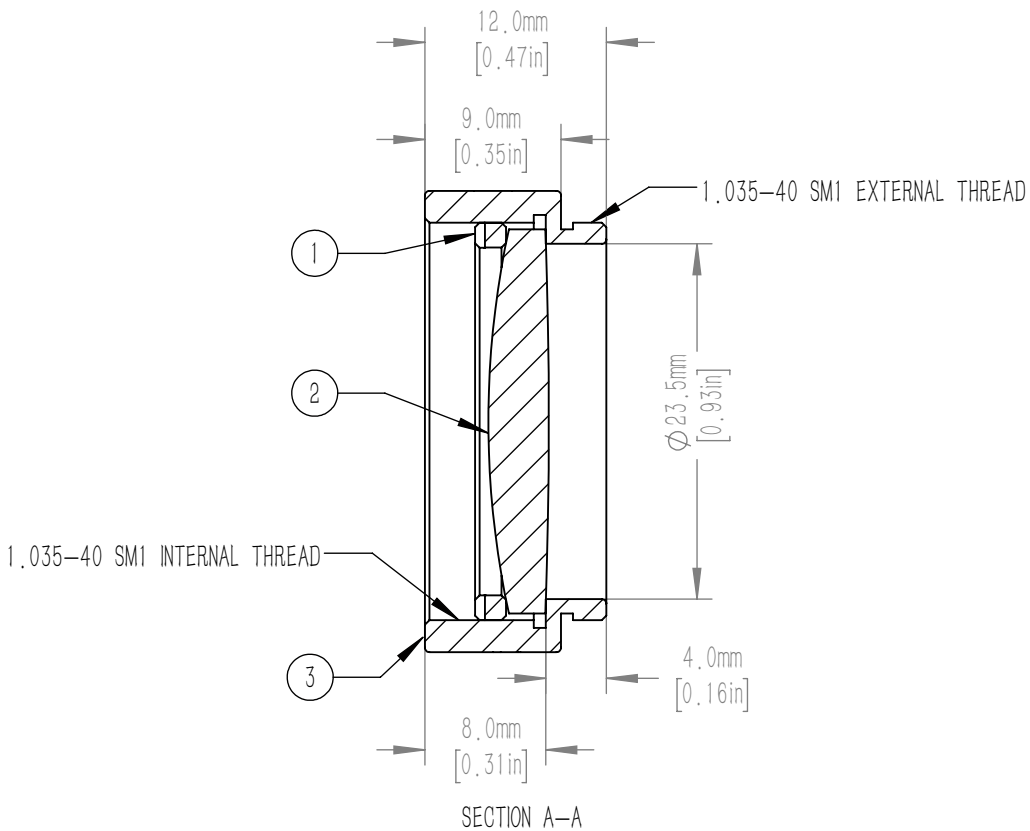


	PART DESCRIPTION	MATERIAL
①	SM1RR	ANODIZED ALUMINUM
②	BFBX1254-100-A	N-BK7
③	SM1L8-A	ANODIZED ALUMINUM

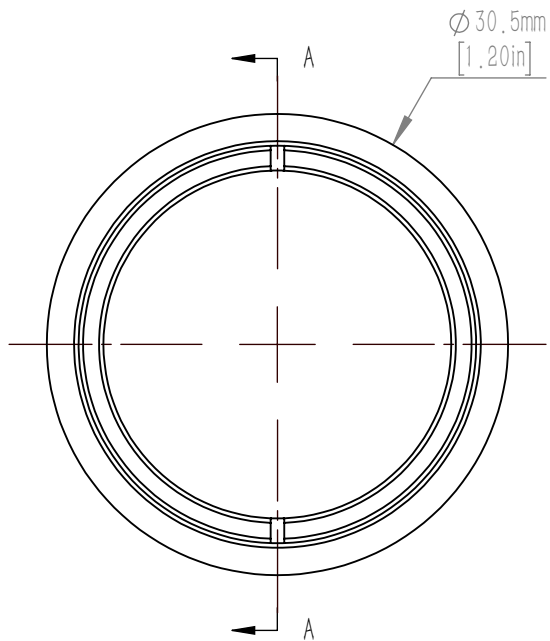

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTHS: 587.6 nm
- FOCAL LENGTH: 100.0 mm $\pm 1\%$
- BACK FOCAL LENGTH (REF): 97.3 mm
- LENS DIAMETER: 25.4 mm $+0.00/-0.10$ mm
- CLEAR APERTURE: $>90\%$ OF LENS DIAMETER
- SURFACE QUALITY: 20-10 SCRATCH-DIG
- CENTRATION: <3 arcmin
- DIFFRACTION LIMITED DIAMETER @632.8 nm: 10.0 mm
- DIFFRACTION LIMITED DIAMETER @1064 nm: 11.5 mm
- COATING: BBAR $R_{avg} < 0.5\%$ FROM 350-700 nm, 0° AOI, ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY NOT FOR
MANUFACTURING PURPOSES

DRAWING PROJECTION							
	NAME	DATE	Mounted D25.4, F=100.0, N-EK7, A Coated, Best Form Lens				
DRAWN	CWD	2022/5/18	BFBX1254-100-A-ML				
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			SEE TABLE	0.00945kg	2:1	A	