
|     | PART DESCRIPTION | MATERIAL          |  |
|-----|------------------|-------------------|--|
| 1   | SM1RR            | ANODIZED ALUMINUM |  |
| 2   | BX1254-500-A     | N-BK7             |  |
| (3) | SM1L6-A          | ANODIZED ALUMINUM |  |

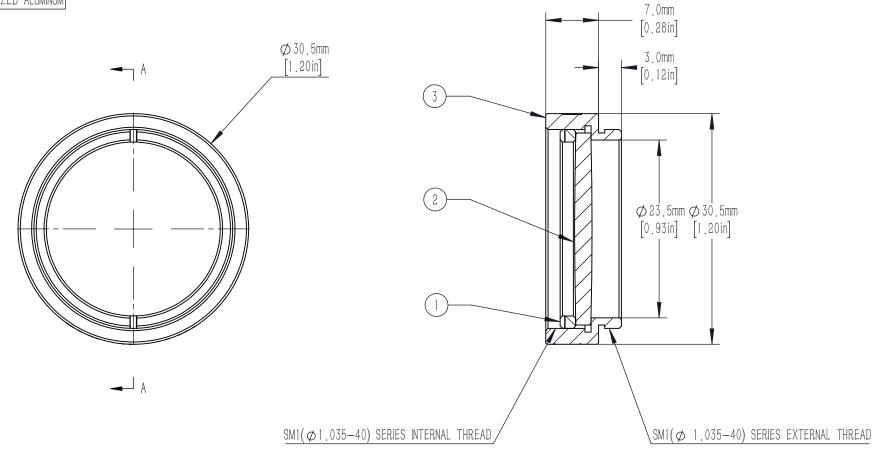

## NOTES/SPECIFICATIONS.

- 1. WORKING WAVELENGTH: 350nm-700nm
- 2. FOCAL LENGTH: f=500.0mm $\pm 1\%$
- 3. CLEAR APERTURE 90% Of Diameter
- 4. SURFACE QUALITY: 40/20
- 5. DESIGN WAVELENGTH: 587.6nm
- 6. COATING: Ravg<0.5%@350-700nm

| DRAWING<br>PROJECTION |           |                        | 不<br>RCOPTICS                                      |         |       |     |
|-----------------------|-----------|------------------------|--|---------|-------|-----|
|                       | NAME      | DATE                   | Mounted N-BK7 Bi-Convex Lens, D25.4 , F= 500mm, -A |         |       |     |
| DRAWN                 | CWD       | 2022/5/18              | BX1254-500-A-ML                                    |         |       |     |
| APPROVAL              | ZSB       | 2022/5/18              | MATERIAL   | WEIGHT  | SCALE | REV |
|                       | RMATION C | NLYNOT FOR<br>PURPOSES | N/A  | 0.009kg | 4:1   | A   |

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES