
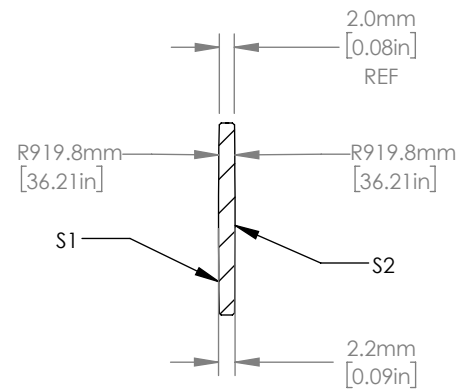


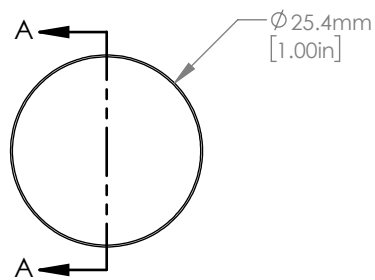

SECTION A-A

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 587.6 nm
2. FOCAL LENGTH:  $f=1003.5 \text{ mm} \pm 1\%$
3. BACK FOCAL LENGTH(REF):  $bf=1002.8 \text{ mm}$
4. CLEAR APERTURE:  $> \text{Ø } 22.86 \text{ mm}$
5. SURFACE QUALITY: 20-10 SCRATCH-DIG
6. CENTRATION:  $\leq 3 \text{ arcmin}$
7. DIAMETER TOLERANCE:  $+0.0/-0.1 \text{ mm}$
8. THICKNESS TOLERANCE:  $\pm 0.1 \text{ mm}$
9. SURFACE IRREGULARITY:  $\leq \lambda/4$ , @633 nm
10. SPHERICAL SURFACE POWER:  $\leq 3\lambda/2$ , @633 nm
11. COATING(S1,S2): VAR R<0.25% PER SURFACE FOR 1550 nm, 0° AOI

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

|                                                     |      |                                                                                       |                                                                                       |          |       |     |
|-----------------------------------------------------|------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|-------|-----|
| DRAWING PROJECTION                                  |      |  |  |          |       |     |
|                                                     | NAME | DATE                                                                                  | F=1000.0mm, D25.4 UVFS Bi-Convex Lens, 1550nm coating                                 |          |       |     |
| DRAWN                                               | CWD  | 2022/5/18                                                                             | EX4254-1000-1550                                                                      |          |       |     |
| APPROVAL                                            | ZSE  | 2022/5/18                                                                             | MATERIAL                                                                              | WEIGHT   | SCALE | REV |
| FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES |      |                                                                                       | UV FUSED SILICA                                                                       | 0.0023kg | 1:1   | A   |