


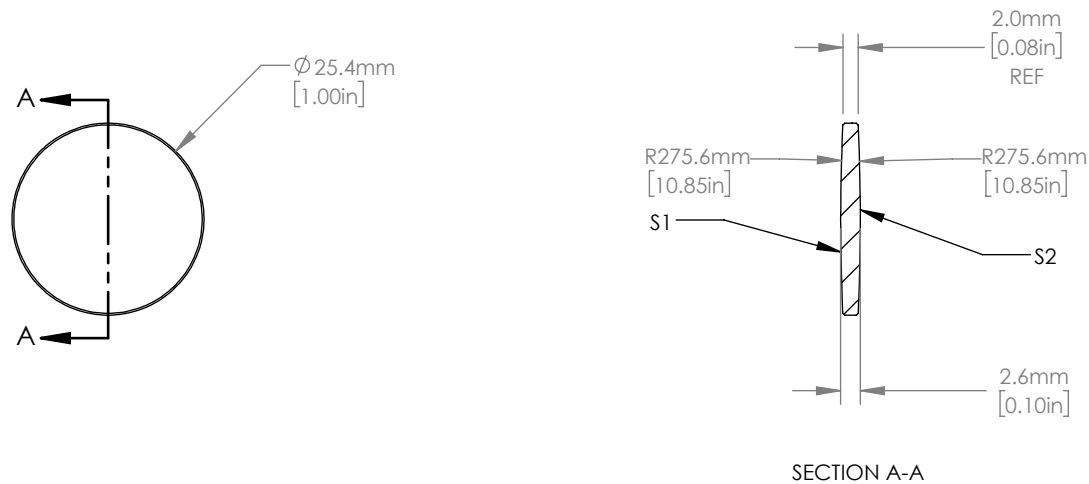

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 587.6 nm
- FOCAL LENGTH: $f=301.1\text{ mm} \pm 1\%$
- BACK FOCAL LENGTH(REF): $bf=300.2\text{ mm}$
- CLEAR APERTURE: $> \varnothing 22.86\text{ mm}$
- SURFACE QUALITY: 40-20 SCRATCH-DIG
- CENTRATION: $\leq 3\text{ arcmin}$
- DIAMETER TOLERANCE: $+0.0/-0.1\text{ mm}$
- THICKNESS TOLERANCE: $\pm 0.1\text{ mm}$
- COATING(S1,S2): BBAR $R_{avg}<0.5\%$ FROM 1050-1700 nm, 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION								
	NAME	DATE	F= 300.0 mm, D25.4 UV Fused Silica Bi-Convex Lens, C Coateding					
DRAWN	CWD	2022/5/18	BX4254-300-C					
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV		
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			UV FUSED SILICA	0.00255kg	1:1	A		