
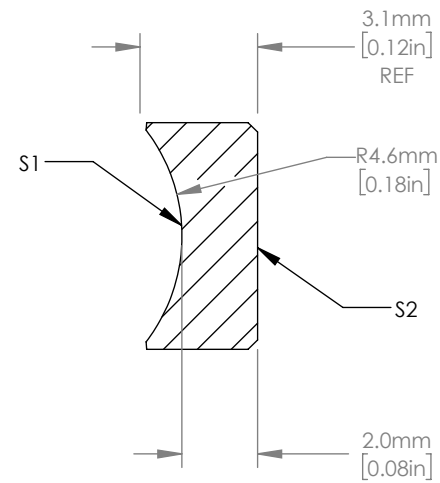


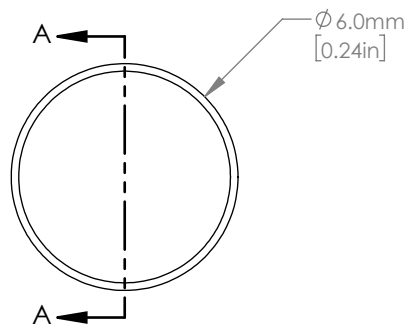

SECTION A-A

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 587.6 nm
- FOCAL LENGTH: $f = -10.0 \text{ mm} \pm 1\%$
- BACK FOCAL LENGTH(REF): $bf = -11.4 \text{ mm}$
- CLEAR APERTURE: $> \text{Ø } 5.4 \text{ mm}$
- SURFACE QUALITY: 20-10 SCRATCH-DIG
- CENTRATION: $\leq 3 \text{ arcmin}$
- DIAMETER TOLERANCE: $+0.0/-0.1 \text{ mm}$
- THICKNESS TOLERANCE: $\pm 0.1 \text{ mm}$
- SURFACE IRREGULARITY: $\leq \lambda/4, @633 \text{ nm}$
- PLANO SURFACE FLATNESS: $\leq \lambda/2, @633 \text{ nm}$
- SPHERICAL SURFACE POWER: $\leq 3\lambda/2, @633 \text{ nm}$
- COATING(S1,S2): VAR R<0.25% PER SURFACE FOR 1064 nm, 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION 						
	NAME	DATE	UVFS PCC Lens, D6mm, F= -10 mm, 1064 nm V-Coating			
DRAWN	CWD	2022/5/18	PC4006--10-1064			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			UV FUSED SILICA	0.0002kg		A