

	ITEM	MATERIAL					
	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM					
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA					



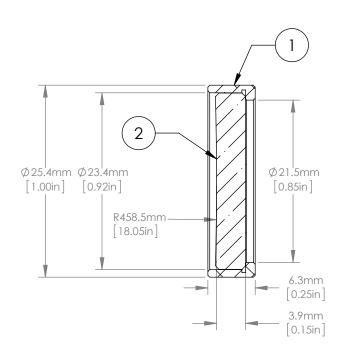

## NOTES/SPECIFICATIONS:

- FOCAL LENGTH: -1000.0mm ±1%
  WORKING DISTANCE: -997.6mm
  DESIGN WAVELENGTH: 587.6nm
  CLEAR APERTURE: >21.0mm
  SURFACE QUALITY: 40-20 SCRATCH-DIG
  CENTRATION: ≤ 3arcmin
  COATING: BBAR 1050-1700nm, Ravg < 0.5%, 0° AOI 1. 2. 3. 4. 5. 6. 7.

## FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			客创光科 RCOPTICS				
	NAME	DATE	D25.4 F= -1000 Mounted Rd UVFS C Coated Plano- Concave Cyl Len				
DRAWN	CWD	2022/5/18	PCY4254RM1000-C				
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.004kg		A		