



	PART DESCRIPTION	MATERIAL
①	SM1RR	ANODIZED ALUMINUM
②	PX1025-75-AB	N-BK7
③	SM1L6-A	ANODIZED ALUMINUM

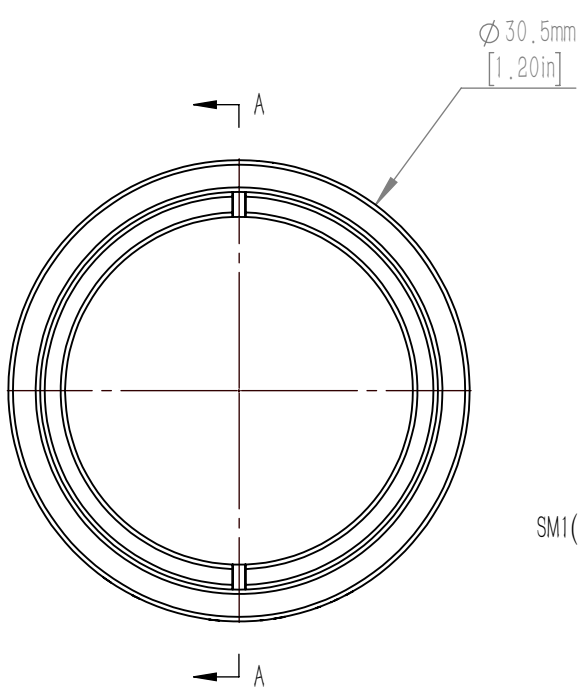

SM1($\phi 1.035-40$) SERIES INTERNAL THREAD

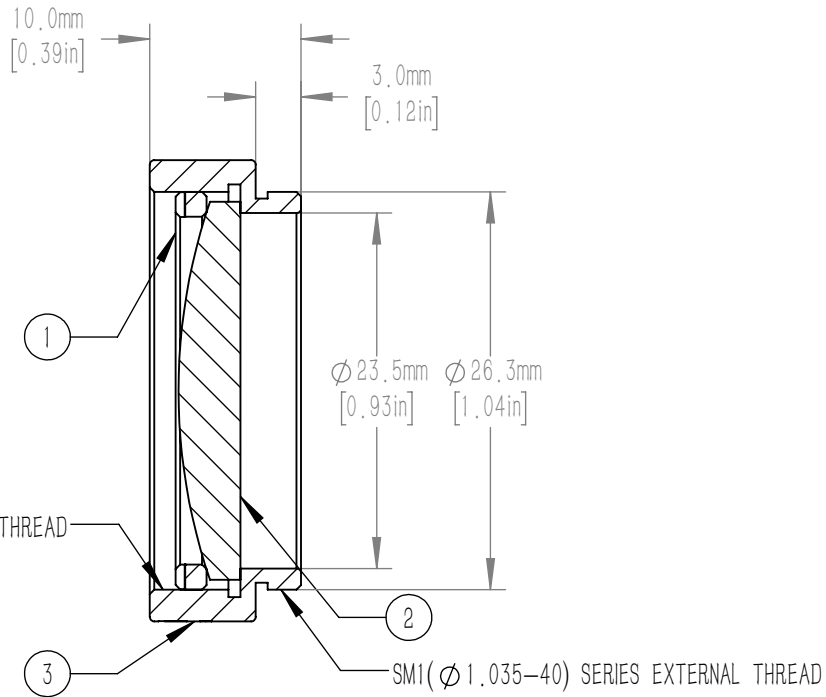

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 587.6nm
- FOCAL LENGTH: $f=75.0\text{mm} \pm 1\%$
- WORKING DISTANCE (REF): 72.2mm
- CLEAR APERTURE: $> 90\%$ Of Diameter
- SURFACE QUALITY: 40-20 SCRATCH-DIG
- COATING: BBAR $R_{\text{avg}} < 1.0\%$ FROM 400-1100nm, AOI: 0° ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY NOT FOR
MANUFACTURING PURPOSES

DRAWING PROJECTION						
	NAME	DATE	Mounted D25 F=75.0 N-EK7 AB Coated Plano Convex Lens			
DRAWN	CWD	2022/5/18	PX1025-75-AB-ML			
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.011kg	2 : 1	A