

| | ITEM | MATERIAL | | |
|---|------------------------------|------------------|--|--|
| 1 | BLACK ANODIZED MOUNTING RING | 6061-T6 ALUMINUM | | |
| 2 | ROUND CYLINDRICAL LENS | UV FUSED SILICA | | |



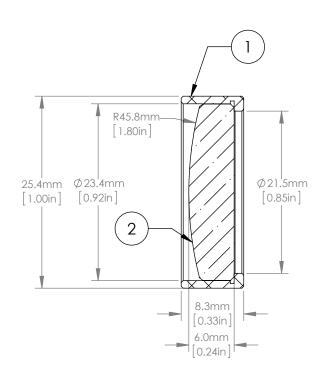

NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.

- FOCAL LENGTH: 100.0mm ±1% WORKING DISTANCE: 94.6mm DESIGN WAVELENGTH: 587.6nm CLEAR APERTURE: >21.0mm SURFACE QUALITY: 40-20 SCRATCH-DIG CENTRATION: ≤ 3crcmin COATING: BBAR 350-700nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | v 🔾 🏵 | | 客创光科 RCOPTICS | | | | |
|--|-------|-----------|--|--------|-------|-----|--|
| | NAME | DATE | D25.4 F= 100 Mounted Rd UVFS A Coated Plano-Convex Cyl Lens | | | | |
| DRAWN | CWD | 2022/5/18 | PXY4254RM-100-A | | | | |
| APPROVAL | ZSB | 2022/5/18 | MATERIAL | WEIGHT | SCALE | REV | |
| FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES | | SEE TABLE | 0. 007kg | | A | | |