
	ITEM	MATERIAL	
1)	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM	
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA	

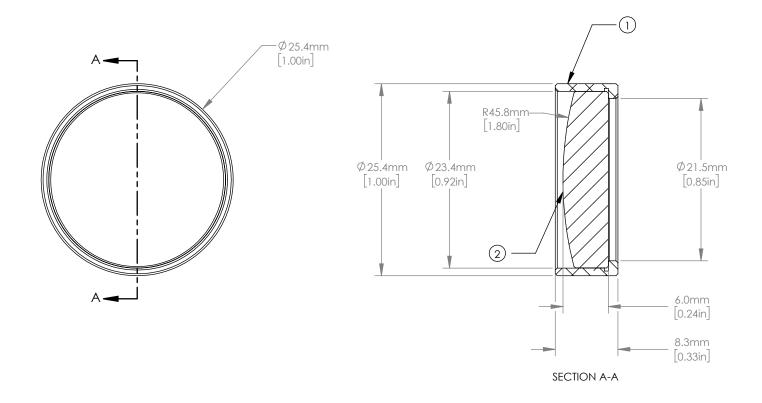

## NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 587.6 nm FOCAL LENGTH: f=100.0 mm  $\pm 1\%$  WORKING DISTANCE (REF): 94.6 mm CLEAR APERTURE:  $> \emptyset$  21.0 mm SURFACE QUALITY: 40-20 SCRATCH-DIG CENTRATION:  $\leq$  3arcmin COATING: BBAR 245-400 nm, Ravg < 0.5%, 0° AOI

## FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION	N 🔾 🏵		客创光科 RCOPTICS				
	NAME	DATE	F= 100.0 mm, D25.4, UVFS Mounted Plano-Convex Rd Cyl Lens				
DRAWN	CWD	2022/5/18	PXY4254RM-100-UV				
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0. 0068kg		A		