

| | ITEM | MATERIAL | |
|---|------------------------------|------------------|--|
| 1 | BLACK ANODIZED MOUNTING RING | 6061-T6 ALUMINUM | |
| 2 | ROUND CYLINDRICAL LENS | UV FUSED SILICA | |

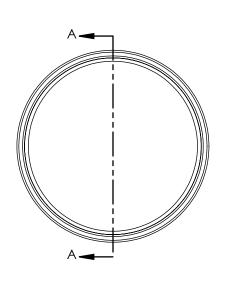

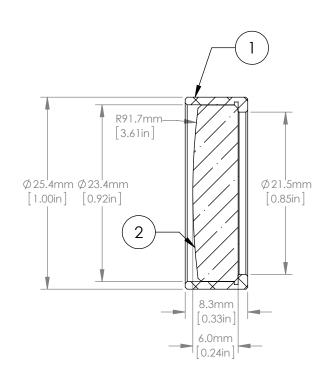

NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.

- FOCAL LENGTH: 200.0mm ±1% WORKING DISTANCE: 194.6mm DESIGN WAVELENGTH: 587.6nm CLEAR APERTURE: >21.0mm SURFACE QUALITY: 40-20 SCRATCH-DIG CENTRATION: ≤ 3arcmin COATING: BBAR 350-700nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | +-++(+)+ | | 客创光科 RCOPTICS | | | | |
|--|----------|-----------|--|--------|-------|-----|--|
| | NAME | DATE | D25.4 F= 200 Mounted Rd UVFS A Coated Plano-Convex Cyl Lens | | | | |
| DRAWN | CWD | 2022/5/18 | PXY4254RM-200-A | | | | |
| APPROVAL | ZSB | 2022/5/18 | MATERIAL | WEIGHT | SCALE | REV | |
| FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES | | SEE TABLE | 0.007kg | | A | | |