

	ITEM	MATERIAL				
	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM				
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA				

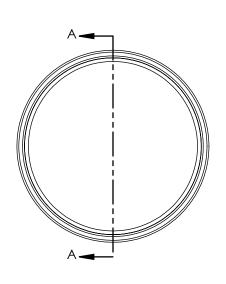

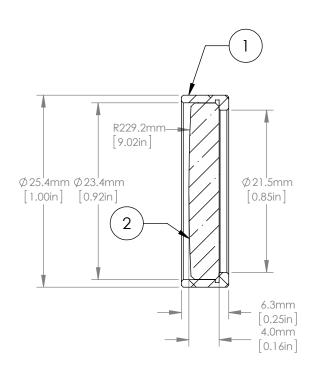

## NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.

- FOCAL LENGTH: 500.0mm ±1%
  WORKING DISTANCE: 496.0mm
  DESIGN WAVELENGTH: 587.6nm
  CLEAR APERTURE: >21.0mm
  SURFACE QUALITY: 40-20 SCRATCH-DIG
  CENTRATION: ≤ 3crcmin
  COATING: BBAR 350-700nm, Ravg < 0.5%, 0° AOI

## FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION	ON C		不 RCOPTICS					
	NAME	DATE	D25.4 F= 500 Mounted Rd UVFS A Coated Plano-Convex Cyl Lens					
DRAWN	CWD	2022/5/18	PXY4254RM-500-A					
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV		
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.005kg		A			