
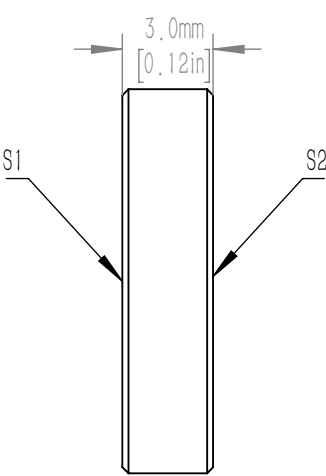


FOR INFORMATION ONLY NOT FOR
MANUFACTURING PURPOSES

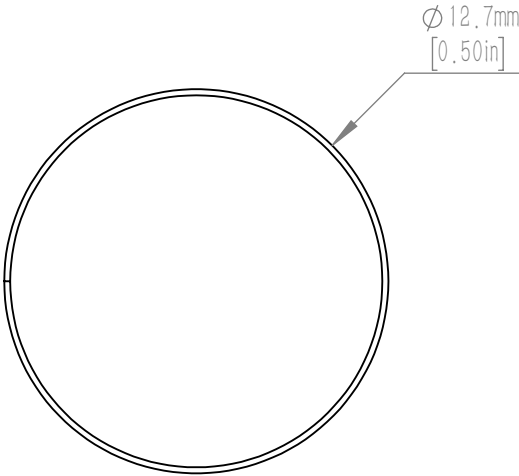

- NOTES/SPECIFICATIONS:
- 1.CLEAR APERTURE: $\geq \phi 11.43\text{mm}$
 - 2.SURFACE FLATNESS: $\leq \lambda/10 @ 633\text{nm}$
 - 3.SURFACE QUALITY: 20-10 SCRATCH-DIG
 - 4.THICKNESS TOLERANCE: $\pm 0.30 \text{ mm}$
 - 5.DIAMETER TOLERANCE: $+0.00/-0.20 \text{ mm}$
 - 6.PARALLELISM: $\leq 5 \text{ arcsec}$
 - 7.COATING(S1 & S2): BBAR RAVG $< 0.5\%$
FROM 1050-1700nm, $0^\circ \pm 5^\circ \text{ AOI}$

DRAWING PROJECTION			睿创光科 RCOPTICS			
	NAME	DATE	D12.7mm, UVFS Polished Window Blank, 3mm, -C			
DRAWN	CWD	2022/5/18	WG4127-3-C			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			UV GRADE FUSED SILICA	0.000931kg	4:1	A