


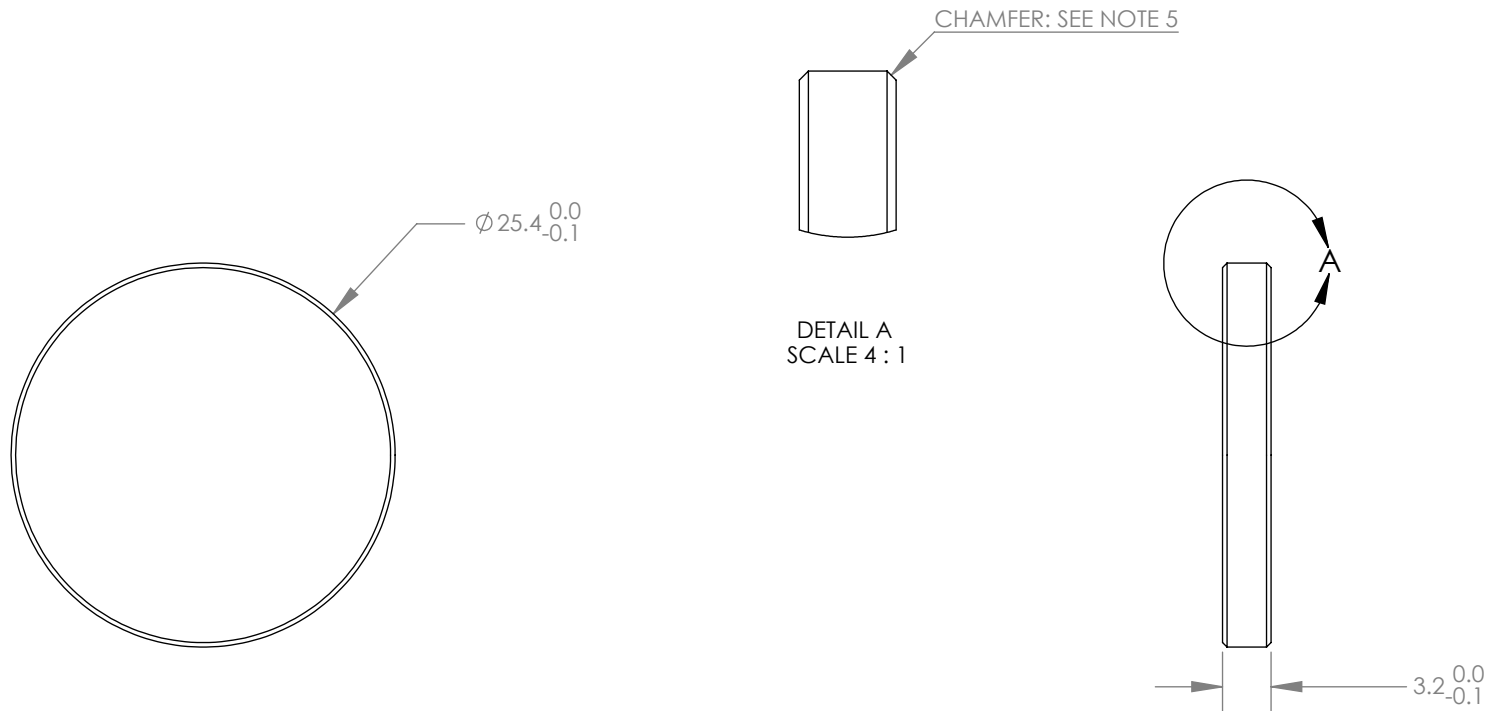

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: $\geq 90\%$ OF DIAMETER
2. SURFACE QUALITY: 40-20 SCRATCH-DIG
3. TRANSMITTED WAVEFRONT DISTORTION: $\lambda/4$ @ 633nm OVER CLEAR APERTURE
4. PARALLELISM: ≤ 3 arc min OVER CLEAR APERTURE
5. CHAMFER ALL EDGES 0.3mm x 45°

DRAWING PROJECTION						
	NAME	DATE	D25.4 UVFS Window, Uncoated, 3.2mm Thick			
DRAWN	CWD	2022/5/18	WG4254-3.2-1			
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			UV GRADE FUSED SILICA		2:1	A