



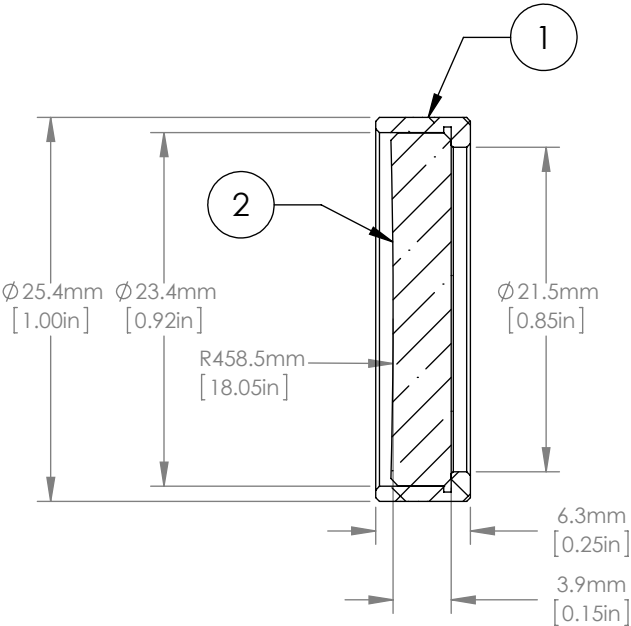

	ITEM	MATERIAL
①	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM
②	ROUND CYLINDRICAL LENS	UV FUSED SILICA

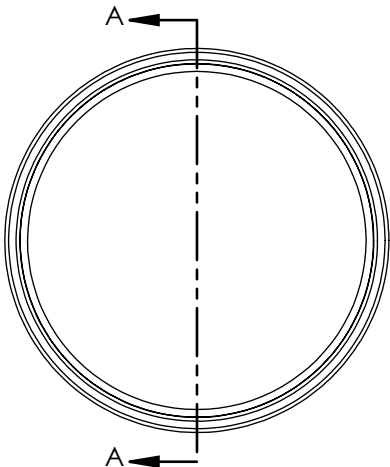

NOTES/SPECIFICATIONS:

1. FOCAL LENGTH: -1000.0mm  $\pm$ 1%
2. WORKING DISTANCE: -997.6mm
3. DESIGN WAVELENGTH: 587.6nm
4. CLEAR APERTURE: >21.0mm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. CENTRATION:  $\leq 3\text{arcmin}$
7. COATING: BBAR 650-1050nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 			
	NAME	DATE	D25.4 F=-1000 Mounted Rd UVFS B Coated Plano-Concave Cyl Len			
DRAWN	CWD	2022/5/18	PCY4254RM--1000-B			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			SEE TABLE	0.004kg		A