

	ITEM	MATERIAL					
1	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM					
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA					



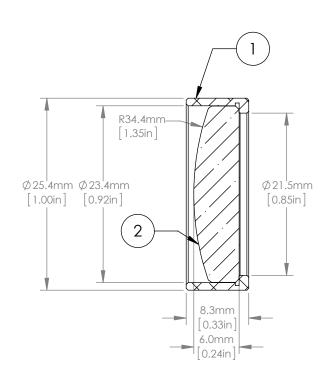

NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.

- FOCAL LENGTH: 75.0mm ±1%
 WORKING DISTANCE: 69.6mm
 DESIGN WAVELENGTH: 587.6nm
 CLEAR APERTURE: >21.0mm
 SURFACE QUALITY: 40-20 SCRATCH-DIG
 CENTRATION: ≤ 3arcmin
 COATING: BBAR 350-700nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION	H-+ +(+)+		○ 睿创光科 RCOPTICS				
	NAME	DATE	D25.4 F= 75 Mounted Rd UVFS A Coated Plano-Convex Cyl Lens				
DRAWN	CWD	2022/5/18	PXY4254RM-75-A				
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.007kg		A		