
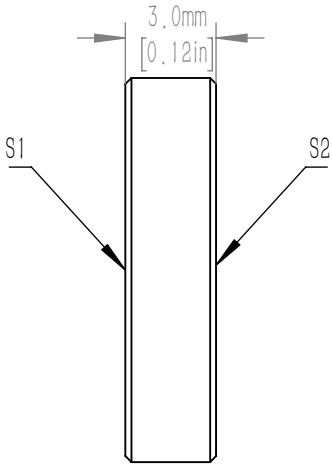


FOR INFORMATION ONLY NOT FOR
MANUFACTURING PURPOSES

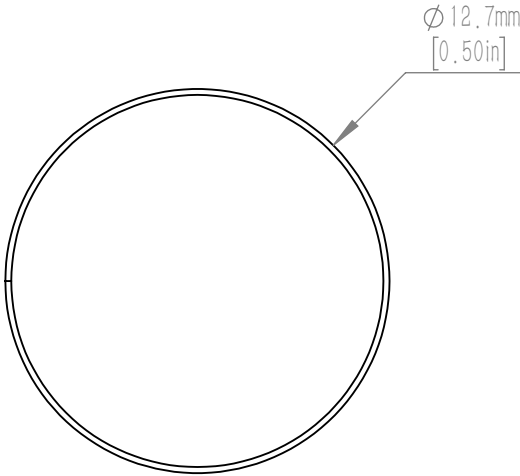

- NOTES/SPECIFICATIONS:
- 1. CLEAR APERTURE: $\geq \phi 11.43\text{mm}$
 - 2. SURFACE FLATNESS: $\leq \lambda/10$ @ 633nm
 - 3. SURFACE QUALITY: 20-10 SCRATCH-DIG
 - 4. THICKNESS TOLERANCE: $\pm 0.30\text{ mm}$
 - 5. DIAMETER TOLERANCE: $+0.00/-0.20\text{ mm}$
 - 6. PARALLELISM: $\leq 5\text{ arcsec}$
 - 7. COATING(S1 & S2): BBAR RAVG $< 0.5\%$
FROM $650-1100\text{nm}$, $0^\circ \pm 5^\circ$ AOI

DRAWING PROJECTION								
	NAME	DATE	D12.7mm, UVFS Polished Window Blank, 3mm, -B					
DRAWN	CWD	2022/5/18	WG4127-3-B					
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV		
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			UV GRADE FUSED SILICA	0.000931kg	4:1	A		